TECNOVAP®

L'ARTE DEL VAPORE®

JUNIOR STAR MAX

SINGLE-PHASE STEAM GENERATOR with automatic refilling system with electromechanical water level control inside the boiler - True Temp™, injection of detergent and wet/dry vac equipped with a float. Digital device with thermometer and hour meter.
Optional: overheated water injection.

GENERATORE DI VAPORE MONOFASE con sistema di ricarica automatica con controllo elettromeccanico livello acqua in caldaia - True Temp™, iniezione di detergente e aspirapolvere/aspiraliquidi dotato di galleggiante. Strumento digitale con termometro e contaore. ***Optional: iniezione acqua surriscaldata.***

EINPHASIGER DAMPFGENERATOR mit automatischem Auffüllsystem mit elektromechanischer Sonde im Dampfkessel - True Temp™, Reinigungsmittelinjektion und Staub- und Flüssigsauger ausgestattet mit einem Schwimmer. Digitalapparat mit thermometer und Stundenzähler. ***Optional: Heißwasserinjektion.***

GÉNÉRATEUR DE VAPEUR MONOPHASÉ avec recharge automatique avec sonde électromécanique de niveau à l'intérieur de la chaudière - True Temp™, injection de détergent et aspirateur eau et poussière équippé d'un flotteur. Dispositif digital avec termomètre et compte-heures.
Optional: injection d'eau surchauffée.

GENERADOR DE VAPOR MONOFÁSICO con recarga automática con sensor de nivel electromecánico al interno de la caldera - True Temp™, inyección de detergente y aspirador agua/polvo dotado de un flotador. Instrumento digital con termómetro y cuentahoras.
En opción: inyección de agua calentada.

Steam generator technical data		
Models	**6 bar**	**8 bar**
Boiler	Stainless steel AISI 304 (with interchangeable heating element)	
Body	Upper body cover: PE Lower body cover: varnished steel	
Boiler volume	5 l	
Water tank	4 l	
Detergent tank	2 l	
Operating pressure	6 bar	8 bar
Steam production	97 g/min - 5,9 kg/h	
Steam temperature	165° C	170° C
Detergent temperature	90° C - 125° C	
Power supply	230 V 1~ 50/60 Hz	
Maximum output	3,65 kW	
Boiler output	3,6 kW	
Vacuum technical data		
Vacuum output	1,2 kW	
Vacuum drum capacity	14 l	
Air flow	200 m3/h	
Depression	2200 mm	
Power cord	8 m	
Weight	45 kg	
Packaging	73x48x53 cm	

6 bar

8 bar

Hose & lance holder

Cable holder

COPYRIGHT TECNOVAP 2014/2015 - We reserve the right to make changes in our products without any notice. The current edition cancels and substitutes all previous editions. The shown images are purely indicative.

TECNOVAP® Ecologic System

ACCESSORIES

RADAMES 6 bar

Steam/vacuum accessories 165° C
Accessori vapore/aspirazione 165° C

STAR 6 bar

Steam/vacuum accessories 165° C - 170° C
Accessori vapore/aspirazione 165° C - 170° C

STEAM MOP

SYSTEM TESTED BY THE UNIVERSITY OF VERONA

JULY 6 bar

Steam accessories 165° C
Accessori vapore 165° C

CHEWING GUM

Steam/vacuum accessories 165° C
Accessori vapore/aspirazione 165° C

APPLICATIONS

HOTEL, BEAUTY FARM & RESTAURANT

CHEWING GUM REMOVAL

HEALTH CARE

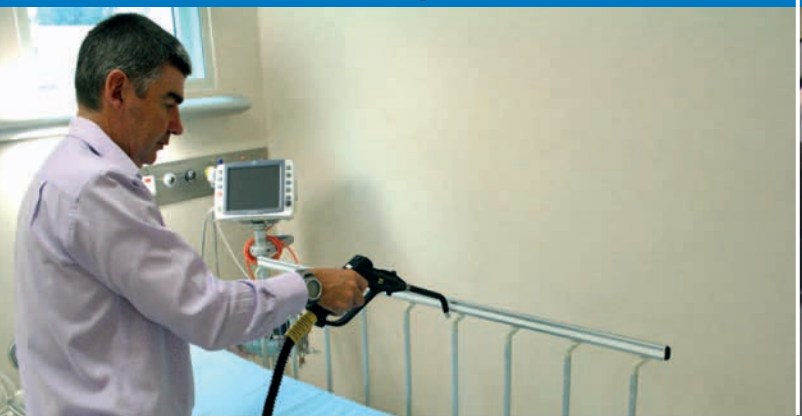

CAR WASH

Via dei Sassi 1/a, 37026 Pescantina (VR) Italy - Tel. +39 045 6767252 - Fax +39 045 6703631 - tecnovap@tecnovap.it